


Customised Load measuring pin KAL / KAL-E

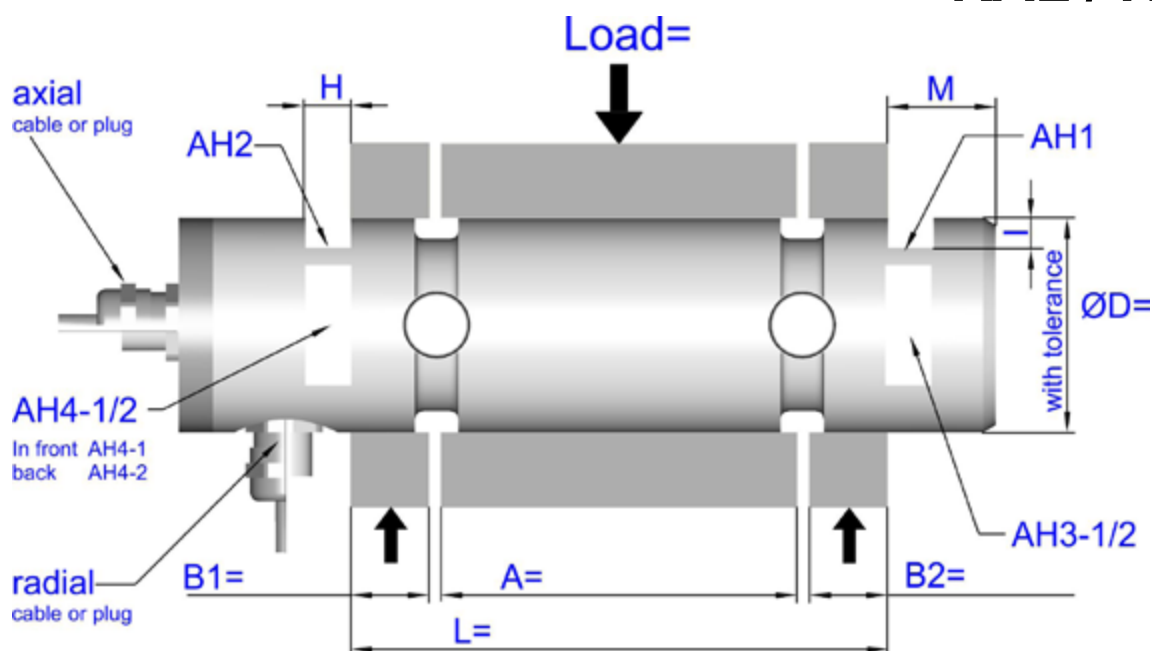

Axle holder by DIN 15058

D	H	I	M
> 20... 25	5.2	4.0...4.5	10
> 25... 40	6.2	4.5...6.5	12
> 40... 50	8.3	6.5...7.0	15
> 50... 63	8.3	7.0...9.5	16
> 63...100	10.5	10...14	20
>100...160	13	15...20	25

Position for axle holder

AH1	AH2	AH3/1	AH3/2	AH4/1	AH4/2
-----	-----	-------	-------	-------	-------

Output

Fixed cable on the sensor	☐	Plug on the sensor	☐	M12	☐	other	☐
Connection cable	☐	m	☐				
Output signal	☐	mV/V	☐	CANopen	☐		
	☐	4-20mA (3-wire)	☐	0 ... 10V	☐	other	☐

Option

Grease drilling	☐	ATEX	☐	Zone 0	Zone 20
Redundant system (from 30 mm outside Ø)	☐			Zone 1	Zone 21
				Zone 2	Zone 22
Quantity		Piece		no	